


OCZKA ŚRUBOWE OCYNKOWANE


OCZKO ze śrubą wg DIN580 ocynkowane

kod	rozmiar nom. d[mm]	max wytrzymałość [kg]	L [mm]	E [mm]	D [mm]	S [mm]	H [mm]	R1 [mm]	R2 [mm]	waga [kg/100szt]
Ocs06	6	140	13,0	10,0	8	20	38	19	37	5,40
Ocs08	8	140	13,0	10,0	8	20	38	20	36	5,65
Ocs10	10	230	17,0	13,0	10	26	46	25	45	10,30
Ocs12	12	340	20,5	13,0	11	30	54	30	54	15,50
Ocs14	14	490	27,0	16,0	13	33	65	35	63	26,10
Ocs16	16	700	27,0	17,0	14	35	64	35	63	29,00
Ocs20	20	1200	30,0	20,0	16	40	74	39	72	42,70
Ocs24	24	1800	36,0	26,0	21	50	92	50	90	86,40
Ocs30	30	3600			24	65	109		108	166,00
Ocs36	36	5100	53,0	36,0	28	73	130	67	126	248,00
Ocs42	42	7000	63,0	37,0	34	85	149	77	143	389,00

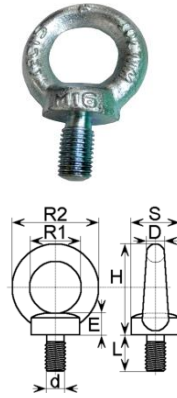

OCZKO z nakrętką wg DIN 582 ocynkowane

kod	rozmiar nom. d[mm]	max wytrzymałość [kg]	E [mm]	D [mm]	S [mm]	H [mm]	R1 [mm]	R2 [mm]	waga [kg/100szt]
Ocn06	6	140	9,0	9	20	36	20	38	5,00
Ocn08	8	140	9,0	9	20	36	20	38	4,80
Ocn10	10	230	13,0	10	25	45	25	45	8,90
Ocn12	12	340	15,0	13	31	54	30	54	15,90
Ocn14	14	490	18,0	14	35	63	33	63	24,50
Ocn16	16	700	17,0	14	35	64	33	63	22,20
Ocn20	20	1200	19,0	16	40	71	37	72	36,00
Ocn24	24	1800	24,0	18	50	90	47	90	64,50
Ocn30	30	3600		24	65	109		108	132,00
Ocn36	36	5100	36,0	28	76	138	67	126	222,80
Ocn42	42	7000	45,0	41	88	154	77	146	311,00

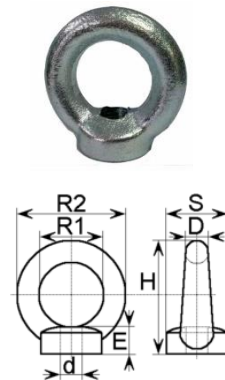

Przed złożeniem zamówienia proszę potwierdzić dostępność towaru.

Przedstawiona oferta cenowa ma charakter informacyjny, nie stanowi oferty handlowej w rozumieniu Art.66 par.1 Kodeksu Cywilnego.